

RichFaces CDK Developer Guide

**This documentation
is work in progress,
thus some mistakes
or incompleteness
is possible**

1. Introduction	1
2. Roadmap document	3
3. Setting up the environment	5
4. inputDate component development	9
4.1. Creating project for component	9
4.2. Creating and building component skeleton	12
4.3. Creating a UI prototype	13
4.4. Creating a Renderer	13
4.4.1. Templating	14
4.4.2. Creating a Renderer Base class	17
4.4.3. Skinnability	20
4.5. Component resources registration	22
4.5.1. resource-config.xml file format	23
4.6. Extending a UIInput class	24
4.7. Configuring component	25
4.7.1. Including common attributes	29
4.8. Creating tag class and descriptors for JSP and Facelets	29
5. Component usage overview	31
6. Generating unit tests	33
7. Button component development	35
8. Creating projects in different IDEs	37
9. Naming conventions	39
10. CDK Tag Reference	41
11. Template tags overview	43

Introduction

The major benefit of the JSF framework is a component based architecture. The component in JSF is not just a set of HTML code rendered and interpreted by a browser. The JSF component is a combination of a client-side widget coupled with the server-side object that represents component behavior including data validation, events handling, business layers bean binding, etc.

Comparing to a page-oriented development approach, JSF allows to use a component-oriented paradigm to build a well-designed, highly customizable UI interface based on reusable components.

However, there is not yet enough sets of rich components on the market that might enable the rapid application development. One of the most important problems is a time-consuming and very complicated process of the component creation. Even the very primitive JSF component requires the `UIComponent` class, `Renderer` class, `Tag` class and a faces configuration file (`faces-config.xml`) to be written.

In order to use the component library in a Facelets environment, you should add the `*.taglib.xml` file to this checklist.

Creation of the rich component takes even more time. You have to provide the `ListenerTagHandler` class, a class for creating a listener interface, an event processing method name in a listener interface, an event class, render specific classes for each possible render kit used with the component.

Therefore, the process of JSF component creation is pretty complicated but repeatable. Jonas Jacobi and John R. Fallows in their "Pro JSF and Ajax Building Rich Internet Components" book describe the process in details. This description and used approaches are very similar to our own experience and have been used as a methodology for Component Development Kit (CDK) - a sub-project of RichFaces that allows you to easily create rich components with built-in Ajax support.

The significant features of the Component Development Kit (CDK) are:

- Quick development start. A new component development starts from a pre-generated component project template. It contains the whole required infrastructure and necessary files generated. It's necessary only to have a [Maven](http://maven.apache.org) [http://maven.apache.org] installed. All other required stuff will be loaded and configured automatically.
- Declarative approach for a component development. It's necessary only to specify meta-data and a code specific for your component. All other required artifacts are generated for you.
- Independent development life-cycle. Component Development Kit (CDK) presumes development of each component isolated from each other with further assembling them into the component library. Hence, this allows to organize a continuous process when one component is already in production condition, but another is just started.

- Possibility to create a first-class rich components with built-in Ajax functionality and add Ajax capability to the existing JSF applications.
- Facility for automatic testing. At the moment of generating the initial project structure, the Unit Test classes are also generated. The RichFaces also provides the Mock-test facility that allows to emulate a run-time environment and automatically test components before their are gathered into the result library.
- Optimization for different JSF implementations. As soon as the most part of a result code is generated, the Component Development Kit (CDK) becomes able to generate an implementation specific code along with a universal code. It makes sense if it's necessary to optimize a result code using features specific for the particular implementation. For example, for using with JSF 1.2 only.
- Create a modern rich user interface look-and-feel with JSP-like templates and skins-based technology. RichFaces comes with a number of predefined skins to get you started, but you can also easily create your own custom skins.

Roadmap document

This document is aimed to describe components development with the Component Development Kit (CDK) and its features.

In order to be successful in Component Development Kit (CDK) usage and components development, it's necessary to be acquainted with Java Server Faces and RichFaces framework. To read more on these topics, please, follow the links:

- [JavaServer Faces Technology](http://java.sun.com/javaee/javaxserverfaces) [http://java.sun.com/javaee/javaxserverfaces]
- [Facelets Official Resource](https://facelets.dev.java.net) [https://facelets.dev.java.net]
- [JSF Official Resource of MyFaces implementation](http://java.sun.com/javaee/javaxserverfaces/reference/api/index.html) [http://java.sun.com/javaee/javaxserverfaces/reference/api/index.html]
- [RichFaces Official Site](http://www.jboss.org/jbossrichfaces) [http://www.jboss.org/jbossrichfaces]

Setting up the environment

In order to start working with the Component Development Kit (CDK) and to create your rich component, it's necessary to have the following installed:

- [The Java SE 5 Development Kit \(JDK\)](http://java.sun.com/javase/downloads/index_jdk5.jsp) [http://java.sun.com/javase/downloads/index_jdk5.jsp]
- [Apache Maven 2.0.9](http://maven.apache.org/download.html) [http://maven.apache.org/download.html]
- [Apache Tomcat 6.0](http://tomcat.apache.org) [http://tomcat.apache.org]
- Browser (on the client side)

After the Maven is installed you should configure it. In this case, please, go to the directory where you've just installed Maven, open a conf/settings.xml file for editing and add to the profiles section this code:

```
...
<profile>
  <id>cdk</id>
  <repositories>
    <repository>
      <id>maven2-repository.dev.java.net</id>
      <name>Java.net Repository for Maven</name>
      <url>http://download.java.net/maven/1</url>
      <layout>legacy</layout>
    </repository>
    <repository>
      <releases>
        <enabled>true</enabled>
      </releases>
      <snapshots>
        <enabled>false</enabled>
        <updatePolicy>never</updatePolicy>
      </snapshots>
      <id>repository.jboss.com</id>
      <name>Jboss Repository for Maven</name>
      <url>http://repository.jboss.com/maven2/</url>
      <layout>default</layout>
    </repository>
  </repositories>
  <pluginRepositories>
    <pluginRepository>
      <id>maven.jboss.org</id>
      <name>JBoss Repository for Maven Snapshots</name>
```

```
<url>http://snapshots.jboss.org/maven2/</url>
<releases>
  <enabled>false</enabled>
</releases>
<snapshots>
  <enabled>true</enabled>
  <updatePolicy>always</updatePolicy>
</snapshots>
</pluginRepository>
<pluginRepository>
  <releases>
    <enabled>true</enabled>
  </releases>
  <snapshots>
    <enabled>false</enabled>
    <updatePolicy>never</updatePolicy>
  </snapshots>
  <id>repository.jboss.com</id>
  <name>Jboss Repository for Maven</name>
  <url>http://repository.jboss.com/maven2/ </url>
  <layout>default</layout>
</pluginRepository>
</pluginRepositories>
</profile>
...
```

In order to activate a new profile, add the following after the profiles section:

```
...
<activeProfiles>
  <activeProfile>cdk</activeProfile>
</activeProfiles>
...
```



Note:

In order to work with Maven from Eclipse, it's possible to download and install the Maven plugin. Please, follow the instruction at [Eclipse plugins for Maven page](http://maven.apache.org/eclipse-plugin.html) [http://maven.apache.org/eclipse-plugin.html]

The environment is set up now to use the Component Development Kit (CDK).

We are going to create two components throughout the RichFaces CDK Developer Guide, but at first you need take the following steps to set up the Project and create your library:

- Create a new directory where all the components will be stored (for example Sandbox).
- Create a file named pom.xml in the directory with the following content:

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/
xsd/maven-4.0.0.xsd">

  <modelVersion>4.0.0</modelVersion>
  <groupId>org.mycompany</groupId>
  <artifactId>sandbox</artifactId>
  <url>http://mycompany.org</url>
  <version>1.0-SNAPSHOT</version>
  <packaging>pom</packaging>
  <dependencies>
    <dependency>
      <groupId>javax.servlet</groupId>
      <artifactId>servlet-api</artifactId>
      <version>2.4</version>
      <scope>provided</scope>
    </dependency>
    <dependency>
      <groupId>javax.servlet</groupId>
      <artifactId>jsp-api</artifactId>
      <version>2.0</version>
      <scope>provided</scope>
    </dependency>
    <dependency>
      <groupId>javax.servlet.jsp</groupId>
      <artifactId>jsp-api</artifactId>
      <version>2.1</version>
      <scope>provided</scope>
    </dependency>
    <dependency>
      <groupId>javax.faces</groupId>
      <artifactId>jsf-api</artifactId>
      <version>1.2_07</version>
    </dependency>
    <dependency>
```

```
<groupId>javax.faces</groupId>
<artifactId>jsf-impl</artifactId>
<version>1.2_07</version>
</dependency>
<dependency>
  <groupId>javax.el</groupId>
  <artifactId>el-api</artifactId>
  <version>1.0</version>
</dependency>
<dependency>
  <groupId>el-impl</groupId>
  <artifactId>el-impl</artifactId>
  <version>1.0</version>
</dependency>
<dependency>
  <groupId>javax.annotation</groupId>
  <artifactId>jsr250-api</artifactId>
  <version>1.0</version>
</dependency>
<dependency>
  <groupId>org.richfaces.ui</groupId>
  <artifactId>richfaces-ui</artifactId>
  <version>3.2.1.GA</version>
</dependency>
</dependencies>
</project>
```

- Close the file

Here are some of these elements with descriptions:

Table 3.1. The POM elements

Element	Description
groupId	Prefix for the Java package structure of your library
url	Namespace for your library to be used in the TLD file
version	Version of your library

inputDate component development

We are going to create the **<inputDate>** component that can take a value, process that value, and then push it back to the underlying model as a strongly typed Date object.

The **<inputDate>** component allows to attach a converter in order to set the desired date format such as mm/dd/yyyy. So the component could convert and validate the date entered by user.

4.1. Creating project for component

At first we need to create a project for the component itself. In the library directory Sandbox you just created, launch the following command (all in one line):

```
mvn archetype:create -DarchetypeGroupId=org.richfaces.cdk -DarchetypeArtifactId=maven-archetype-jsf-component -DarchetypeVersion=3.2.1.GA -DartifactId=inputDate
```

As is easy to see a new directory with the name inputDate will be created. It does not have any components in it yet, but it has this predefined structure:

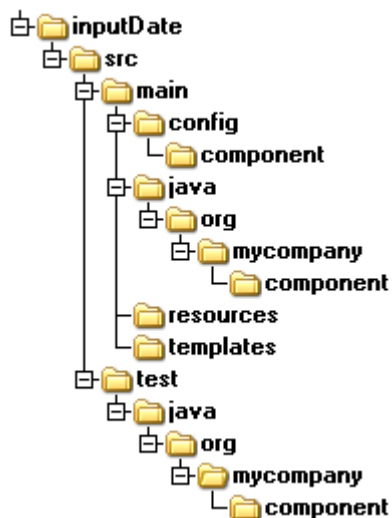


Figure 4.1. The project structure

Here are the main directories with descriptions:

Table 4.1. The project structure

Directory	Description
src/main/config	Contains the metadata for the components
src/main/java	Contains Java code (both pre-generated and created by you)

Directory	Description
src/main/resources	Used to store resource files, such as pictures, JavaScript and CSS files
src/main/templates	Used to contain the JSP-like templates that define the component layout

It is necessary to extend a predefined structure with the following directories:

Table 4.2. The project structure

Directory	Description
src/main/config/resources	Contains the resource-config.xml file for the resources registration
src/main/java/org/mycompany/renderkit	Contains Renderer Base class
src/main/resources/org/mycompany/renderkit/html/css	Used to store CSS files
src/main/resources/org/mycompany/renderkit/html/images	Used to store images
src/main/templates/org/mycompany	Used to contain the JSP-like template

Now you should add maven-compiler-plugin to the plugins section in the inputDate/pom.xml file:

```
...  
<plugin>  
  <artifactId>maven-compiler-plugin</artifactId>  
  <inherited>true</inherited>  
  <configuration>  
    <source>1.5</source>  
    <target>1.5</target>  
  </configuration>  
</plugin>  
...
```

Finally your inputDate/pom.xml should look like this one:

```
<?xml version="1.0"?>  
<project>  
  <parent>  
    <artifactId>sandbox</artifactId>  
    <groupId>org.mycompany</groupId>  
    <version>1.0-SNAPSHOT</version>
```

```
</parent>
<modelVersion>4.0.0</modelVersion>
<groupId>org.mycompany</groupId>
<artifactId>inputDate</artifactId>
<name>inputDate</name>
<version>1.0-SNAPSHOT</version>
<build>
  <plugins>
    <plugin>
      <groupId>org.richfaces.cdk</groupId>
      <artifactId>maven-cdk-plugin</artifactId>
      <version>3.2.1.GA</version>
      <executions>
        <execution>
          <phase>generate-sources</phase>
          <goals>
            <goal>generate</goal>
          </goals>
        </execution>
      </executions>
      <configuration>
        <library>
          <prefix>org.mycompany</prefix>
          <taglib>
            <shortName>inputDate</shortName>
          </taglib>
        </library>
      </configuration>
    </plugin>
    <plugin>
      <artifactId>maven-compiler-plugin</artifactId>
      <inherited>true</inherited>
      <configuration>
        <source>1.5</source>
        <target>1.5</target>
      </configuration>
    </plugin>
  </plugins>
</build>
<dependencies>
  <dependency>
    <groupId>junit</groupId>
    <artifactId>junit</artifactId>
    <version>3.8.1</version>
```

```
<scope>test</scope>
</dependency>
<dependency>
  <groupId>org.richfaces.framework</groupId>
  <artifactId>richfaces-impl</artifactId>
  <version>3.2.1.GA</version>
</dependency>
</dependencies>
</project>
```

4.2. Creating and building component skeleton

Let's create a skeleton for the **<inputDate>** component.

You need to go to the inputDate directory and then launch the following command:

```
mvn cdk:create -Dname=inputDate
```

As a result three artifacts will be created:

- An XML configuration file for the metadata
- A UI class
- A JSP-like template

In order to build the component you should stay in the inputDate directory and launch the following command:

```
mvn install
```

This command generates and compiles the library and then creates a result JAR file. A directory named target will be created along with a src directory. If you get a file named target/inputDate-1.0-SNAPSHOT.jar, everything is set up successfully.

If you want to rebuild the component you could use the following command:

```
mvn clean install
```


4.3. Creating a UI prototype

It is a good idea to create at first a prototype of the intended markup. You will find out which markup elements the component has to generate and also which renderer-specific attributes are needed in order to parameterize the generated markup.

The **<inputDate>** component consists of an HTML form **<input>** element, an **** element, and **<div>** element:

```
...  
<div title="Date Field Component">  
  <input name="dateField" value="01 January 2008" />  
    
</div>  
...
```

All information about styles applied to the **<inputDate>** component is provided in the following chapter.

This is the result of your prototype which shows a simple page with an input field and an icon indicating that this is a date field:




Figure 4.2. The date field component prototype implementation in HTML with an icon

4.4. Creating a Renderer

Component functionality typically centers around two actions: decoding and encoding data. Decoding is the process of converting incoming request parameters to the values of the component. Encoding is the process of converting the current values of the component into the corresponding markup. In the following figure you can see decoding and encoding occur in the JSF lifecycle:

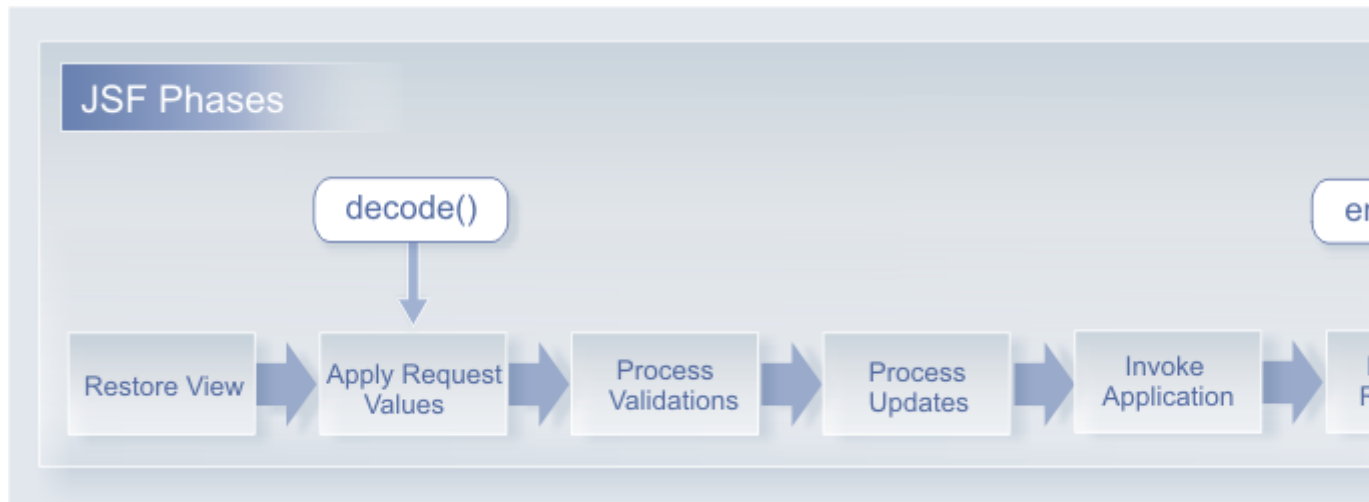


Figure 4.3. Decoding and encoding in the JSF lifecycle

Thus, JSF components consist of two parts: the component class and the renderer. The component class is responsible for the state and behavior of a UI component and will be discussed later in the "Configuring component" section.

The Renderer is responsible for the JSF component representation. It generates the appropriate client-side markup, such as HTML, WML, XUL, etc. Renderer is also responsible for the converting information coming from the client to the proper type for the component (for example, a string value from the request is converted to a strongly type `Date` object).

It is necessary to create following renderer classes for the `<inputDate>` component:

- `InputDateRenderer` class where you should override `encode()` methods for encoding the markup and resources
- `InputDateRendererBase` class where you should override `decode()` method. You could also define associated converter in this class.

You could actually implement the renderer-specific component subclass that exposes client-side attributes such as `"style"`, `"class"`, etc. It is common practice to implement the client-specific component subclass to make some aspects of application development easier, but in our case we do not need to do it. The `<inputDate>` is a simple `UIInput` component, therefore `InputDateRenderer` class generates all the markup itself.

It is a time to start creating the `InputDateRenderer` class. The smartest way to create the `InputDateRenderer` class is a Templating mechanism, one of the most convenient features of the Component Development Kit (CDK).

4.4.1. Templating

The Component Development Kit (CDK) allows to use templates for generation Renderer class.

Templates are JSP-like markup pages with special tags that are converted into Renderer by a build script.

It's possible to use evaluated expressions in components templates with the help of scriptlets. It's also possible to create the base class for a template to implement additional functions in it, so as the functions could be called from the template. Hence, in the generated Renderer class there are corresponding function calls on the place of these elements.

Let's create the template for HTML 4.0 markup. At first you should proceed to the `inputDate/src/main/templates/org/mycompany` directory where `htmlInputDate.jspx` template file is stored. This file contains a Template Skeleton like this one:

```
<?xml version="1.0" encoding="UTF-8"?>
<f:root
  xmlns:f="http://ajax4jsf.org/cdk/template"
  xmlns:c=" http://java.sun.com/jsf/core"
  xmlns:ui=" http://ajax4jsf.org/cdk/ui"
  xmlns:u=" http://ajax4jsf.org/cdk/u"
  xmlns:x=" http://ajax4jsf.org/cdk/x"
  class="org.mycompany.renderkit.html.InputDateRenderer"
  baseclass="org.ajax4jsf.renderkit.AjaxComponentRendererBase"
  component="org.mycompany.component.UInputDate"
>
  <f:clientid var="clientId"/>
  <div id="#{clientId}"
    x:passThruWithExclusions="value,name,type,id"
  >
  </div>
</f:root>
```

According to the created UI prototype you need to extend Template Skeleton with proper elements:

- **<div>**-wrapper element with *"title"*, *"id"* attributes and with the *"caption"* facet

```
...
<div id="#{clientId}" title="#{value}" x:passThruWithExclusions="value,name,type,id">
  ...
</div>
...
```

- **<input>** element with "id", "value", "name", "type", "class", "style" attributes. It is possible to use the "icon" facet in order to redefine a default icon of the component.

```
...
<input id="#{clientId}"
      name="#{clientId}"
      type="text"
      value="#{this.getValueAsString(context, component)}"
      class="my-inputDate-input #{component.attributes['inputClass']}"
      style="#{component.attributes['inputStyle']}" />
...
```

- **** element with "src", "class", "style" attributes which defines a default icon of the component. In order to add an image to the Template you should register it with the help of **<f:resource>** template tag and bind to a variable specified by the "var" attribute:

```
...
<f:resource name="/org/mycompany/renderkit/html/images/inputDate.png" var="icon" />
...

...
```

The **<inputDate>** component uses styles that should be defined in the template with the help of **<h:styles>** tag:

```
...
<h:styles>/org/mycompany/renderkit/html/css/inputDate.xcss</h:styles>
...
```

How to register all resources is explained in the ["Component resources registration"](#) chapter.



Important:

Don't forget to add namespace `xmlns:h="http://ajax4jsf.org/cdk/h"` to the **<f:root>** element:

```
<?xml version="1.0" encoding="UTF-8"?>
<f:root
```

```

...
xmlns:h=" http://ajax4jsf.org/cdk/h"
...
>
...
</f:root>

```

Here is a full example of the template for the **<inputDate>** component: [htmlInputDate.jspx](#) [examples/htmlInputDate.jspx].



Note:

As it is seen in the Template Skeleton the Renderer Baseclass is `org.ajax4jsf.renderkit.AjaxComponentRendererBase`. You need to define Renderer Base class special for the **<inputDate>** component. In the next section "[Creating a Renderer Base class](#)" we will create Renderer Base class `org.mycompany.renderkit.InputDateRendererBase`.

All the Template tags you could find in the "[Template tags overview](#)" chapter.

4.4.2. Creating a Renderer Base class

After the component tree is restored on the Restore View Phase , each component in the tree extracts its new value from the request parameters by using its `decode()` method. Then the value is stored locally on the component.

In order to create `InputDateRendererBase` class you should proceed to the `src/main/java/org/mycompany/renderkit` directory and create this class there:

```

package org.mycompany.renderkit;
import java.io.IOException;
import java.util.Map;
import java.util.TimeZone;
import javax.faces.component.UIComponent;
import javax.faces.context.ExternalContext;
import javax.faces.context.FacesContext;
import javax.faces.convert.Converter;
import javax.faces.convert.ConverterException;
import javax.faces.convert.DateTimeConverter;
import org.ajax4jsf.renderkit.HeaderResourcesRendererBase;
import org.mycompany.component.UInputDate;

```

```
public abstract class InputDateRendererBase extends HeaderResourcesRendererBase {  
    ...  
}
```

The `InputDateRendererBase` class extends a `HeaderResourcesRendererBase` class. In the `HeaderResourcesRendererBase` class all the `encode()` methods for the right resources encoding are already implemented, so in the `InputDateRendererBase` class you need to override the `decode()` method only:

```
...  
public void decode(FacesContext context, UIComponent component){  
    ExternalContext external = context.getExternalContext();  
    Map requestParams = external.getRequestParameterMap();  
    UIInputDate inputDate = (UIInputDate)component;  
    String clientId = inputDate.getClientId(context);  
    String submittedValue = (String)requestParams.get(clientId);  
    if (submittedValue != null) {  
        inputDate.setSubmittedValue(submittedValue);  
    }  
}  
...
```

As you see in the example above the `decode()` method reads values from request parameters, grabs the `clientId` from the component to identify the request parameter to be looked up. The `clientId` is calculated as the fully qualified name of the component given its container path: `nameOfForm:nameOfComponent` (for example `myForm:inputDate`). The last step of the `decode()` method is to store the submitted value locally on the component.



Note:

By default, the base `Renderer` implementation returns the `submittedValue` directly without any conversion! If you want to convert submitted value to a strongly typed object you should implement `Converter` and the `getConvertedValue()` method in your `Renderer` class (in our case in the `InputDateRendererBase` class).

4.4.2.1. Creating a Converter

As it was mentioned before the `<inputDate>` component at the Apply Request Values phase takes a value and pushes it to the model as a strongly typed `Date` object. Therefore you need to implement a `Converter` in the `Renderer Base` class and also check whether a `Converter` has been already attached by the application developer. If the conversion of the value fails, an error message associated with the component is generated and queued on `FacesContext`.

The `getConverter()` method of the `InputDateRendererBase` class returns the a converter, as shown in the following example:

```
...
private Converter getConverter(FacesContext context, UIInputDate inputDate){
    Converter converter = inputDate.getConverter();
    if (converter == null){
        // default the converter
        DateTimeConverter datetime = new DateTimeConverter();
        datetime.setLocale(context.getViewRoot().getLocale());
        datetime.setTimeZone(TimeZone.getDefault());
        datetime.setType("date");
        datetime.setDateStyle("medium");
        datetime.setPattern("d/m/y");
        converter = datetime;
    }
    return converter;
}
...
```

During the converter creation you should check whether the application developer has attached a Converter to the `<inputDate>` component already (for example, `<f:convertDateTime>`) . If not you should follow the next steps:

- create a new `DateTimeConverter`
- get the locale for the client from the context with the help of the `getLocale()` method and set it on the new Converter by means of the `setLocale()` method
- set the time zone, date type, date style, and date pattern on the new converter with the help of `setTimeZone()`, `setType()`, `setDateStyle()`, and `setPattern()` methods respectively
- return the Converter

After the Apply Request Values phase the application enters the Process Validation phase during which the `validate()` method calls the `getConvertedValue()` method on every submitted value and passes the newly submitted value from the decode process.

The `getConvertedValue()` method converts the submitted value to a strongly typed object (in our case `Date`) using the `getAsObject()` method. Then the new strongly typed object is validated and if there are no errors Process Validation phase ends. Otherwise the `getConvertedValue()` method throws a `ConverterException`.

Here is the snippet:

```
...
public Object getConvertedValue(FacesContext context, UIComponent component, Object
submittedValue) throws ConverterException{
    UIInputDate inputDate = (UIInputDate)component;
    Converter converter = getConverter(context, inputDate);
    String valueString = (String)submittedValue;
    return converter.getAsObject(context, component, valueString);
}
...
```

Finally on the Renderer Response phase the value of the component is rendered back to the view. The converter is responsible for transforming the object data back in to a string representation, so you need to implement `getValueAsString()` method:

Here is the example:

```
...
protected String getValueAsString(FacesContext context, UIComponent component) throws
IOException {
    UIInputDate inputDate = (UIInputDate) component;
    String valueString = (String) inputDate.getSubmittedValue();
    if (valueString == null) {
        Object value = inputDate.getValue();
        if (value != null) {
            Converter converter = getConverter(context, inputDate);
            valueString = converter.getAsString(context, component, value);
        }
    }
    return valueString;
}
...
```

You could find the whole example of the `InputDateRendererBase` class [here](#) [examples/InputDateRendererBase.java].

4.4.3. Skinnability

One of the significant features of the Component Development Kit (CDK) is a skins-based technology which helps you to create a modern rich user interface look-and-feel. RichFaces has a number of predefined skins you could use with the `<inputDate>` component. But if you want to create your own skin, please, read carefully the "Skinnability" section of the [RichFaces Developer Guide](http://www.jboss.org/file-access/default/members/jbossrichfaces/) [http://www.jboss.org/file-access/default/members/jbossrichfaces/

freezone/docs/devguide/en/html/ArchitectureOverview.html#Skinnability]. You could find all necessary information about Built-in skinnability in RichFaces, XCSS file format, Plug-n-Skin feature, etc. there.

It's time to create XCSS file. You should go to the `src/main/resources/org/mycompany/renderkit/html/css` and create `inputDate.xcss` file there with the following skeleton:

```
<?xml version="1.0" encoding="UTF-8"?>
<f:template xmlns:f='http://jsf.exadel.com/template'
  xmlns:u='http://jsf.exadel.com/template/util'
  xmlns="http://www.w3.org/1999/xhtml">
  ...
</f:template>
```

According to the **<inputDate>** markup you need to define following selectors and classes in the `inputDate.xcss`:

- `.my-inputDate-input`, `.my-inputDate-icon` selectors

```
...
<u:selector name=".my-inputDate-input">
  <u:style name="border-color" skin="panelBorderColor"/>
  <u:style name="background-color" skin="controlBackgroundColor"/>
  <u:style name="color" skin="controlTextColor"/>
  <u:style name="font-family" skin="generalFamilyFont"/>
  <u:style name="font-size" skin="generalSizeFont"/>
</u:selector>
<u:selector name=".my-inputDate-icon">
  <u:style name="border-color" skin="panelBorderColor"/>
  <u:style name="background-image">
    <f:resource f:key="/org/mycompany/renderkit/html/images/inputDate.png" />
  </u:style>
</u:selector>
...
```

- `.my-inputDate-input`, `.my-inputDate-icon`, and `.my-inputDate-caption` classes

```
...
.my-inputDate-input{
background-color: #EBEBE4;
border: 1px solid #7F9DB9;
```

```
float:left;
}
.my-inputDate-icon{
margin-left: 3px;
}
.my-inputDate-caption{
color: #000000;
}
...
```

You could find a complete inputDate.xcss [here](#) [examples/inputDate.xcss].

4.5. Component resources registration

The **<inputDate>** component has a number of resources that should be registered in the resource-config.xml file. If the resource is registered, the RichFaces filter will send a request to the ResourceBuilder class in order to create and to deliver the resource.

Hence, you need to proceed to the inputDate/src/main/config/resources directory and register the following resources in the resource-config.xml file:

- an icon

```
...
<resource>
  <name>org/mycompany/renderkit/html/images/inputDate.png</name>
  <path>org/mycompany/renderkit/html/images/inputDate.png</path>
</resource>
...
```

- the inputDate.xcss file

```
...
<resource>
  <name>org/mycompany/renderkit/html/css/inputDate.xcss</name>
  <path>org/mycompany/renderkit/html/css/inputDate.xcss</path>
</resource>
...
```

[Here](#) [examples/resource-config.xml] you could find a complete example of the resource-config.xml for the **<inputDate>** component.

4.5.1. resource-config.xml file format

The resource-config.xml is a file for resources registration. Note, that the resource-config.xml should appear in the META-INF folder after the component building.

This file has the **<resource-config>** root element with nested **<resource>** elements.

It is possible to register static resources (images, JavaScript , CSS, XCSS, SWF, (X)HTML, XML, Log files), dynamic created images, component-incapsulated, JAR resources, etc.

Here is a simple example of the image registration:

```
...
<resource>
  <name>org/mycompany/renderkit/html/images/inputDate.png</name>
  <path>org/mycompany/renderkit/html/images/inputDate.png</path>
</resource>
...
```

There are two elements in the example above: an obligatory **<name>** element which defines resource name and a **<path>** element which defines the path to the resource. The **<path>** element is optional as it is possible to register dynamic resources with the "class" attribute. For example you could register a dynamically created image as it is shown in the following example:

```
...
<resource class="org.mycompany.renderkit.html.images.inputDate">
  <name>org.mycompany.renderkit.html.images.inputDate</name>
</resource>
...
```

With the help of the **<cacheable>** element you could manage whether the resource is cached or not. If the value of this element is "true", the resource is cached on the server and also on the client sides:

```
...
<resource class="org.mycompany.renderkit.html.images.inputDate">
  <name>org.mycompany.renderkit.html.images.inputDate</name>
  <cacheable>true</cacheable>
</resource>
...
```

You could start a session for the some resource using **<session-aware>** element set to "true":

```
...
<resource>
  <name>org/mycompany/renderkit/html/scripts/inputDate.js</name>
  <path>org/mycompany/renderkit/html/scripts/inputDate.js</path>
  <session-aware>true</session-aware>
</resource>
...
```

Sometimes the definition of a content type of the resource is needed, so it is possible to add the **<content-type>** element with the proper MIME type.

You could also define a custom renderer for the resource:

```
...
<resource>
  <name>org/mycompany/renderkit/html/scripts/inputDate.js</name>
  <path>org/mycompany/renderkit/html/scripts/inputDate.js</path>
  <renderer class="org.ajax4jsf.resource.ScriptRenderer"/>
</resource>
...
```

It is possible to specify a MIME type for the resource renderer using the **<content-type>** element.

4.6. Extending a UIInput class

The base class for all JSF components is `UIComponent`. When you develop **<inputDate>** component you could see that you subclass `UIComponentBase` at first. This class extends `UIComponent`, and provides default implementations of the all of the abstract methods of `UIComponent`.

You could proceed to the `src/main/java/org/mycompany/component` directory and find a `UIInputDate.java` there:

```
package org.mycompany.component;
import javax.faces.component.UIComponentBase;
/**
 * JSF component class
 */
public abstract class UIInputDate extends UIComponentBase {
    public static final String COMPONENT_TYPE = "org.mycompany.InputDate";
    public static final String COMPONENT_FAMILY = "org.mycompany.InputDate";
}
```

```
}
```

The **<inputDate>** is a simple input component therefore you should import `javax.faces.component.UIInput` class and extend it:

```
package org.mycompany.component;
import javax.faces.component.UIInput;
/**
 * JSF component class
 *
 */
public abstract class UIInputDate extends UIInput {
    public static final String COMPONENT_TYPE = "org.mycompany.InputDate";
    public static final String COMPONENT_FAMILY = "org.mycompany.InputDate";
}
```

Each component is associated with a component type, which is used as "JSF recognized" name of the **<inputDate>** component. We will refer to this later in our tag handler.

The component class is the actual class path address of our **<inputDate>** component.

As it was mentioned before, the **<inputDate>** component has some attributes that are bound to the properties in the `UIInputDate` class (for example title, title, name, type, etc.). The next thing to do is to save the component state by overriding `saveState()` and `restoreState()` component methods. But you do not have to do it in the `UIInputDate` class by hand!

You should configure the **<inputDate>** component in the `inputDate.xml`, and the CDK factory will generate the complete `UIInputDate` class. How to configure the component is explained in the ["Configuring component"](#) chapter.

4.7. Configuring component

Well, it is almost the final step in the component creation process - component configuration.

Note that you should register all the classes and attributes of the **<inputDate>** component. If you will create the component dynamically on a page you should register the component in the faces context configuration file - `faces-config.xml`. If you use a custom tag on a JSP page you need a TLD file for registration. If you plan to use Facelets you need `inputDate.taglib.xml` descriptor.

The CDK factory uses the `inputDate.xml` file for generating not only the complete `UIInputDate` class, but also a JSP Tag Handler, `faces-config.xml` and descriptors for JSP and Facelets.

Please, proceed to the `src/main/config/component` directory, open the [inputDate.xml](#) [examples/inputDate_skeleton.xml] in your favorite text editor and take a look at the skeleton: there is a root element **<components>** with the one nested **<component>** element.



Tip:

It is possible to create a number of components in the one project. For example `<rich:dataTable>` is a complex component that includes a `<rich:column>` and/or `<rich:columns>` components.

Application instance stores resources defined in the descriptors at application start-up, so it is necessary to register following classes:

- the `UIInputDate` class

```
...
<name>org.mycompany.InputDate</name>
<family>org.mycompany.InputDate</family>
<classname>org.mycompany.component.html.HtmlInputDate</classname>
<superclass>org.mycompany.component.UIInputDate</superclass>
...
```

- the `InputDateRenderer` class with the `htmlInputDate.jspx` template

```
...
<renderer generate="true" override="true">
  <name>org.mycompany.InputDateRenderer</name>
  <template>org/mycompany/htmlInputDate.jspx</template>
</renderer>
...
```

- the `InputDateTag` class (the JSP Tag Handler)

```
...
<tag>
  <name>inputDate</name>
  <classname>org.mycompany.taglib.InputDateTag</classname>
  <superclass>
    org.ajax4jsf.webapp.taglib.HtmlComponentTagBase
  </superclass>
</tag>
...
```

Note that you have not closed the **<component>** element because you are still going to add more metadata for your new component. Lets to add attributes to the inputDate.xml configuration file as shown in the example below.

Example:

```
...
<property>
  <name>value</name>
  <classname>java.lang.String</classname>
  <description>
    The value of the component
  </description>
</property>
<property>
  <name>title</name>
  <classname>java.lang.String</classname>
  <description>
    Defines a title of the component
  </description>
  <defaultvalue>&quot;inputDate&quot;</defaultvalue>
</property>
<property>
  <name>name</name>
  <classname>java.lang.String</classname>
  <description>
    Defines a name of the component
  </description>
</property>
<property>
  <name>styleClass</name>
  <classname>java.lang.String</classname>
  <description>
    Corresponds to the HTML class attribute
  </description>
</property>
<property>
  <name>inputStyle</name>
  <classname>java.lang.String</classname>
  <description>
    Style attribute for input field
  </description>
</property>
<property>
```

```
<name>inputClass</name>
<classname>java.lang.String</classname>
<description>
  Style Class attribute for the input field
</description>
</property>
<property>
  <name>iconClass</name>
  <classname>java.lang.String</classname>
  <description>
    Style Class attribute for the icon element
  </description>
</property>
<property>
  <name>iconStyle</name>
  <classname>java.lang.String</classname>
  <description>
    Style attribute for the icon element
  </description>
</property>
<property>
  <name>captionClass</name>
  <classname>java.lang.String</classname>
  <description>
    Style Class attribute for the Caption facet
  </description>
</property>
...
```

As you can see in the example above every attribute is defined with the help of the **<property>** element with the following nested elements:

- the **<name>** element that defines the name of the attribute
- the **<classname>** element that defines the class of the attribute's value
- the **<description>** element that defines the description of the attribute. This description appears in the TLD file.
- the **<defaultvalue>** element that defines the default value for the attribute

The last thing worth mentioning is the common attributes that are included through the named entities:

...


```
&ui_component_attributes;  
...
```

If you want to add `UIInput` components and HTML events common attributes for the `<inputDate>` component you should add the following entities:

```
...  
&ui_component_attributes;  
&html_events;  
&ui_input_attributes;  
...
```

[Here](#) [examples/inputDate.xml] is a full example of the inputDate.xml for the `<inputDate>` component.

More information about the common attributes you could find in the [Including common attributes](#) section.

4.7.1. Including common attributes

One of the useful features of the CDK is the possibility to include common attributes to the component. In order to facilitate development process, the CDK provides a set of entities that contain custom attributes sets for components (events, action attributes, etc.). This common attributes could be included with the predefined entities (for example `&ui_component_attributes;`, `&html_events;`, `&ui_input_attributes;`, etc.).

You could find all the entities [here](http://anonsvn.jboss.org/repos/richfaces/trunk/cdk/generator/src/main/resources/META-INF/schema/entities) [http://anonsvn.jboss.org/repos/richfaces/trunk/cdk/generator/src/main/resources/META-INF/schema/entities].

4.8. Creating tag class and descriptors for JSP and Facelets

The last step is to create a JSP tag handler and descriptors.

JSF components are not inherently tied to JSP. You will use a custom tag (a.k.a action) on the JSP page to indicate which JSF `UIComponent` is needed for the application. The custom tag has a corresponding tag handler class, which is responsible for creating the `UIComponent` and transferring each declarative JSP tag attribute to the `UIComponent` instance. Hence you need a custom tag class that returns the component type (`org.mycompany.InputDate`) and the renderer (`org.mycompany.InputDateRenderer`).

After the tag class creation you need to register it in the descriptors: in the TLD (Tag Library Descriptor) file for JSP pages and in the inputDate.taglib.xml file for Facelets.

But you know that inputDate.xml configuration file generates the JSP tag handler and descriptors instead of you! Just proceed to the inputDate folder and launch the following command:

```
mvn clean install
```

After the generation process you will find in the inputDate/target/classes/META-INF folder inputDate.tld, inputDate.taglib.xml, resources-config.xml, and faces-config.xml files.

The `InputDateTag` class could be found in the inputDate/target/classes/org/mycompany/taglib.

Well done! The **<inputDate>** component is created. The [inputDate-1.0-SNAPSHOT.jar](#) [examples/inputDate-1.0-SNAPSHOT.jar] for the component usage could be found in the inputDate/target folder.

Component usage overview

Work in progress...

Generating unit tests

Work in progress...

Button component development

Work in progress...

Creating projects in different IDEs

Work in progress...

Naming conventions

Work in progress...

CDK Tag Reference

Work in progress...

Template tags overview

Work in progress...
